



# MONOFLOW PLUS

PRODUCT LINE



Designed for maximum durability, three layers are chemically bonded together with SBR rubber mixed in with the base layer for added shock absorption. Three seamless layers of an organic based urethane can stand up to the most demanding floor schedule. It will take the abuse of ball games, conventions and social gatherings and can be resurfaced without needing to be removed.





# MONOFLOW PLUS



## Highlights


- Designed and manufactured in the USA
- Resurface without removal
- Low maintenance & low lifecycle costs
- Seamless surface
- Floor Score and Leed contributions

## Physical Properties

Intermediate & Top Layer

|                  |                                   |
|------------------|-----------------------------------|
| Surface hardness | 65 shore A (+/-3)                 |
| Thickness        | 3/8" Custom thicknesses available |
| Tensile strength | 600 psi                           |
| Weight per 1/8"  | .89 lbs                           |
| Elongation       | 250-300%                          |
| Tear strength    | 111 pli                           |
| Flammability     | Inflammable/ASTM D2859-02         |

## Construction

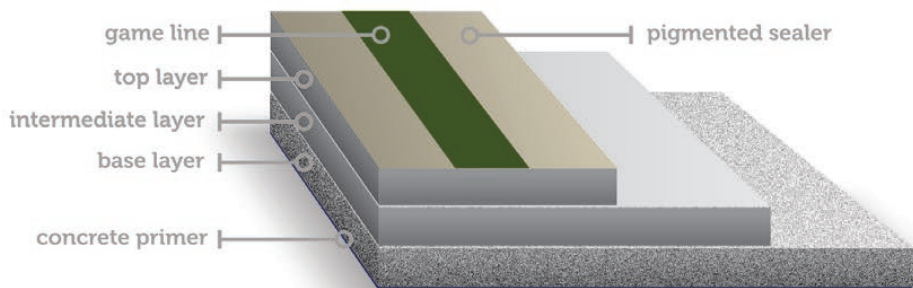

## Pigmented Sealer

Water Based Low VOCs

## Wear Layers - Top & Intermediate Layers

Rapid Renewable Formulation No VOCs

## Base Layer

Fine mesh, recycled SBR (styrene-butadiene rubber) & polyurethane mixed to produce a self leveling force reduction layer.

## Standard Floor Colors Custom Colors Available



## Standard Line Colors Custom Colors Available



Sweets.com

