



MONOFLOW

PRODUCT LINE



Designed for maximum durability, three layers are chemically bonded together to create our strongest system. Three seamless layers of an organic based urethane can stand up to the most demanding floor schedule. It will take the abuse of ball games, conventions and social gatherings. The Monoflow System can be resurfaced without needing to be removed.



MONOFLOW




Highlights

- Designed and manufactured in the USA
- Resurface without removal
- Low maintenance & low lifecycle costs
- Seamless surface
- Floor Score and Leed contributions

Physical Properties

Surface hardness	65 shore A (+/-3)
Tensile strength	600 psi
Thickness	1/4", 3/8" or 1/2" <small>2mm over-pour for existing floors also available</small>
Weight per 1/8"	.89 lbs
Elongation	250-300%
Weight	2.67 lb @ 3/8"
Tear strength	111 pli
Flammability	Inflammable/ASTM D2859-02

Construction

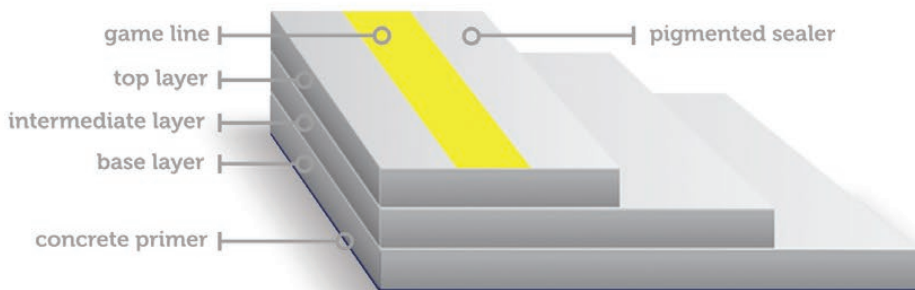

Top Coat

Water Based Low VOCs

Wear Layers

Rapid Renewable Formulation No VOCs

Free of Heavy Metals

Standard Floor Colors Custom Colors Available



Standard Line Colors Custom Colors Available



Sweets.com

